


Revisions				
Zone	Rev	Description	Date	Approved

Double Folding Gate Installation Instructions

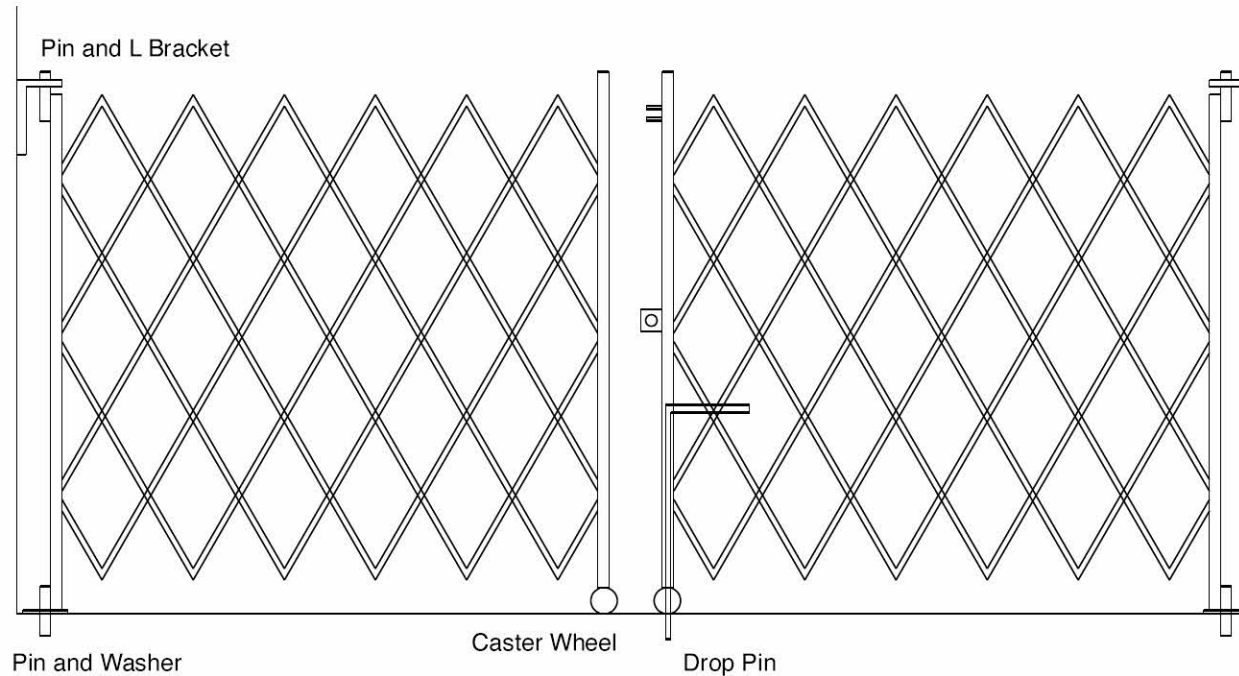

- 1) Mark center of hole 2" from wall for 5/8" pin at bottom of gate
- 2) Drill 3/4" dia hole and place 5/8" washer over hole
- 3) Insert bottom pin of gate in washer and drilled hole
- 4) Install L Brackets to wall:
 - WOOD: Use 5/16" x 2" lag bolts
 - STEEL: Drill and tap for 5/16" x 2" bolts
 - BRICK OR CONCRETE: Use 5/16" x 2" lag bolts in 3/8" holes with lead anchors
- 5) Repeat steps 1 thru 4 for other side of gate
- 6) Stretch gates to center and drill 3/4" hole for drop pin

Unless Otherwise Specified: Dimensions in Inches Tolerances: Fractional ± Angular: Mach ± Bend ± Two Place Decimal ± Three Place Decimal ±		Name	Date	Wholesale Gate Co. Double Folding Gate Installation Instructions
		Drawn		
		Checked		
		ENG Appr.		
		MFR Appr.		
		QA		
	Comments			
Material		CAD Generated Drawing Do Not Manually Update		Size
Finish				Drawing No.
Do Not Scale Drawing				Rev
				A DbI - Install A
				Scale
				NTS
				CAD File
				Sheet
				1 of 1